

东莞创恩电子有限公司

技术参数

1. 产品名称	金属按钮开关				
2. 产品型号	Q16超短款环型灯				
3. 电气参数	0.5A /250VAC				
4. 使用温度范围	-20℃~+55℃				
5. 防护等级	IP65 , IK10, IP40				
6. 开关组合	1N0				
7. 操作类型	自复式				
8. LED电压	3V-220V				
9. 灯珠寿命	40000小时				
10. 性能					
机械性能	项目	试验条件		规格	
	动作力	沿垂直方向对开头缓缓施加负荷		约2~4N	
	机械寿命	在无加载情况下, 以30次/分速度		操作循环次数达50万次	
	可焊性	焊锡温度230±5℃ 浸渍时间3±0.5S		沾锡面积为浸渍围的90%以上	
	抗热性	焊锡温度260±5℃ 浸渍时间5±1S		电气、机械性能无异常	
电气性能	接触电阻	6V. DC		≤ 50mΩ	
	绝缘电阻	500V. DC 历时1min		≥1000mΩ	
	技术要求				
	耐电压测试	测试条件		要求	
		微断开	1000Vac/50Hz, 历时1min		无闪络无击穿
		基本绝缘	1000Vac/50Hz, 历时1min		
	耐久测试	过载测试	0.5A/250VAC, 6-10次/分, 共50次		功能正常
		耐久测试	0.5A/250VAC, 6-10次/分, 共10000次		
温度测试		0.5A/250V, 连续通电1h直至温升稳定, 连接导线规格: 18AWG		端子温度≤30K	

备注：避免在高温环境下存放！

东莞创恩电子有限公司

Descriptions
*This Φ16mm self recovery
push button is Stainless Steel
*The front button is Stainless Steel

Applications
*Shipping
*Security Equipment
*Household appliance
*Medical equipment
*Starter
*bathroom
*Access control



东莞创恩电子有限公司

Product appearance





Product size

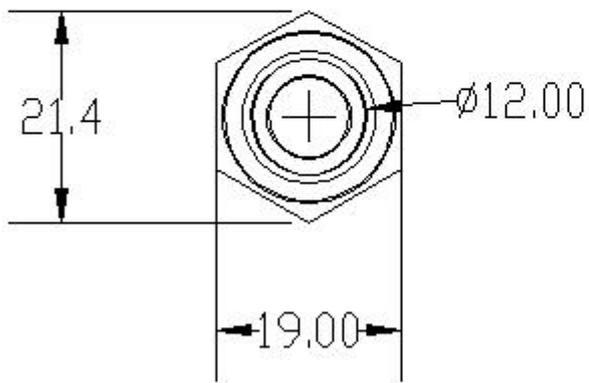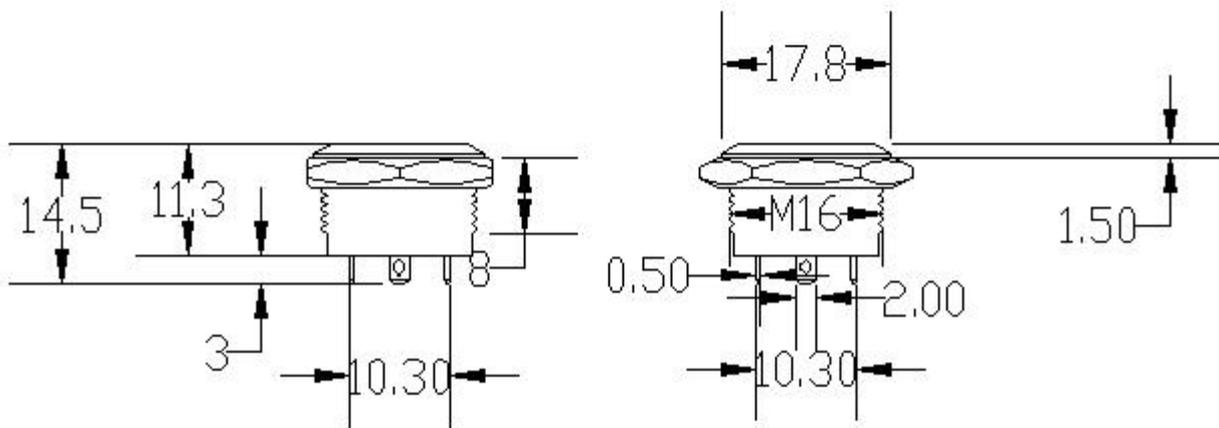

Product assembly and accessories

黄铜螺母
Brass nut




黄铜外壳OR不绣外壳
Brass case OR unembroidered case



304不绣钢环型按键
304 stainless steel ring keys



PC环型灯内镶件
Inner insert for PC ring lamp



PC灯圈限位座
PC lamp ring limit seat



硅胶防水圈IP65
Silicone waterproof ring IP65



LED灯珠轻触开关
LED light beads touch the switch




PA66尼龙底座
PA66 nylon base



黄铜H62开关功能脚和灯脚
Brass H62 switch function pin and lamp pin



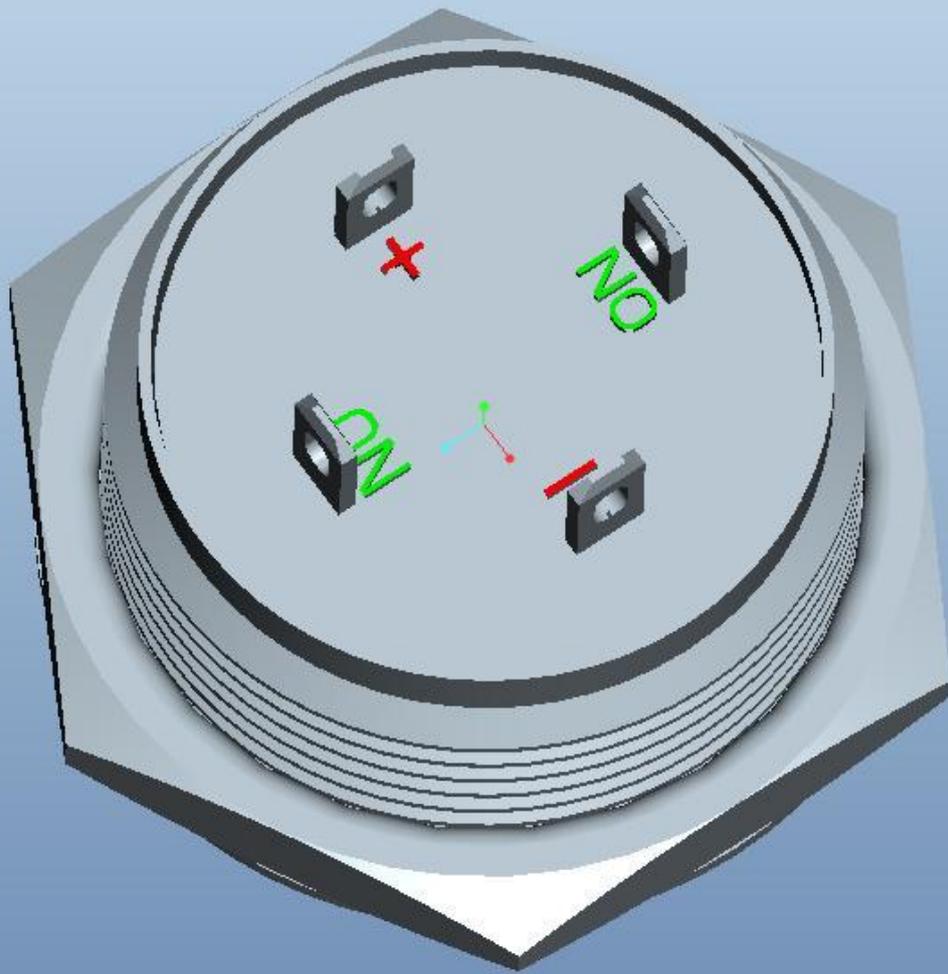

- 1.开关上面+-是灯脚接线
- 2.开关上NO脚是开关功能脚

Product wiring diagram