

东莞创恩电子有限公司

技 术 参 数

1. 产品名称		金属按钮开关		
2. 产品型号		Q8		
3. 电气参数		1A /250VAC		
4. 使用温度范围		-20℃～+55℃		
5. 防护等级		IP65 ， IK10， IP40		
6. 开关组合		1N0		
7. 操作类型		自复式		
8. LED电压				
9. 灯珠寿命				
10. 性能				
机械性能	項目	试验条件		规格
	动作力	沿垂直方向对开头缓缓施加负荷		约2～4N
	机械寿命	在无加负载情况下， 以30次/分速度		操作循环次数达50万次
	可焊性	焊锡温度230±5℃ 浸渍时间3±0. 5S		沾锡面积为浸渍围的90％以上
	抗热性	焊锡温度260±5℃ 浸渍时间5±1S		电气、机械性能无异常
电气性能	接触电阻	6V. DC		≤ 50m Ω
	绝缘电阻	500V. DC 历时1min		≥1000m Ω
	技術要求			
	耐电压测试	测试條件		要求
		微断开	1000Vac/50Hz, 历时1min	无闪络无击穿
		基本绝缘	1000Vac/50Hz, 历时1min	
	耐久测试	过载测试	1A/250VAC, 6-10次/分, 共50次	功能正常
		耐久测试	1A/250VAC, 6-10次/分, 共10000次	
	温度测试		1A/250V, 连续通电1h直至温升稳定，连接导线规格：18AWG	端子温度≤30K

东莞创恩电子有限公司


Descriptions
This ϕ 8mm reset
push button is Stainless Steel
*The front button is Stainless Steel

Applications
*Shipping
* Security Equipment
* Household appliance
* Medical equipment
*Starter
*bathroom
*Access control

东莞创恩电子有限公司

Product appearance



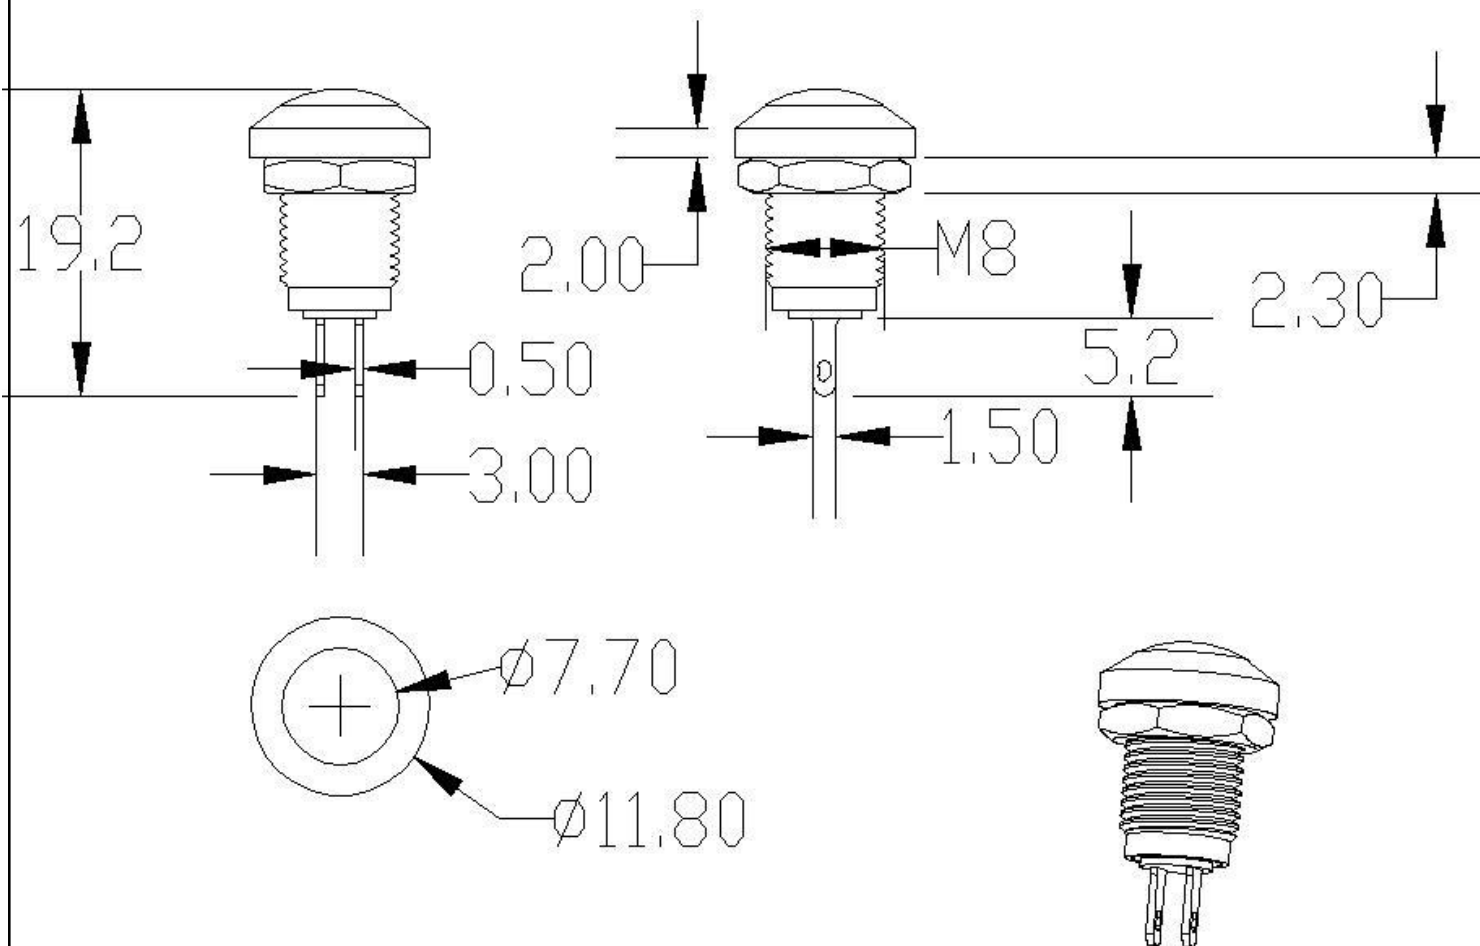

Product size

Product assembly and accessories



黄铜螺母
Brass nut



304不锈钢盖子
304 no embroidered steel lid



PC盖子
The PC cover



硅胶防水圈
Silicone waterproof ring



外壳304不锈钢 或黄铜
Case 304 not embroidered steel or brass



尼龙双6上座
Nylon double 6 upper seat



黄铜定位柱
Brass positioning post




黄铜跳板
The brass springboard



尼龙双6底座
Nylon double 6 base



黄铜冲针
Brass blunt needle

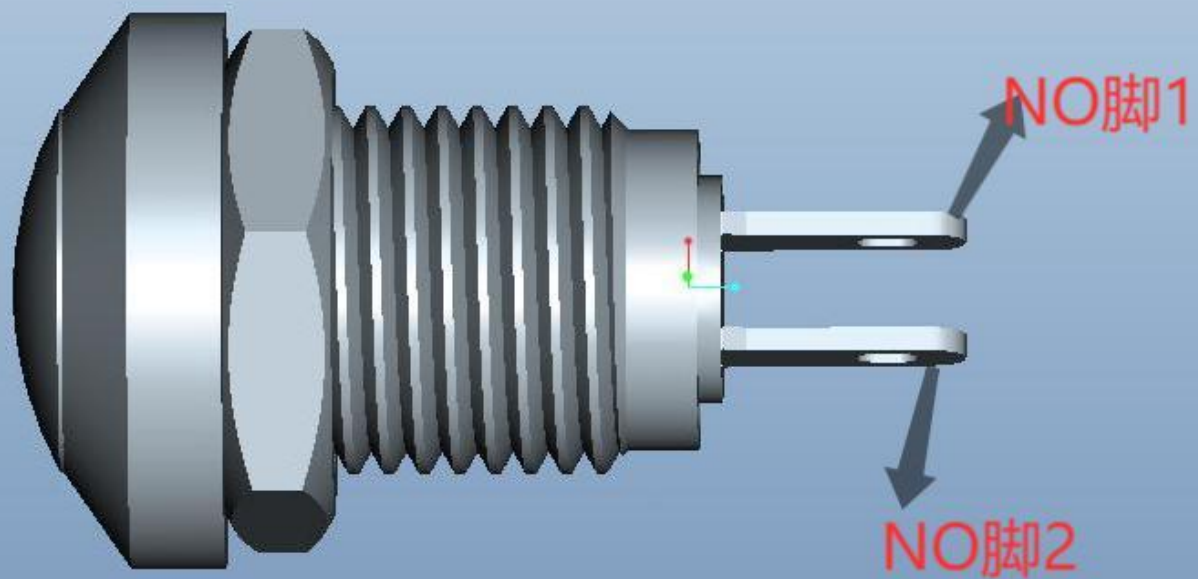

- 1 When NO pin 1 and NO pin 2 are connected
- 2 Press to turn on the power
- 3 Release to turn off the power

Product wiring diagram